


P.C.B LAYOUT
TOP VIEW ±0.05



MATERIALS

HOUSING: HI-TEMP. PLASTIC (UL 94V-0)
 SHELL: STAINLESS STEEL, NICKEL PLATING
 SOLDER PAD: STAINLESS STEEL, GOLD FLASH
 TERMINAL: COPPER ALLOY, GOLD PLATING ON CONTACT AREA
 TIN PLATING ON SOLDER TAIL



SPECIFICATION

CURRENT RATING: 0.5 AMP MAX
 DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
 CONTACT RESISTANCE: 100m OHMS MAX
 INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
 OPERATION TEMPERATURE: -40°C~+85°C

PART NUMBER:
MMCRD - 0 7 * T - 1 2 1

SERIES ——— NO. OF POS. ——— CONTACT PLATED OPTION ——— TAPE REEL PACKAGE ——— TIN PLATING ON SOLDER TAIL ———

1: GOLD FLASH
 3: 3u" GOLD
 5: 5u" GOLD
 6: 10u" GOLD
 7: 15u" GOLD
 9: 30u" GOLD







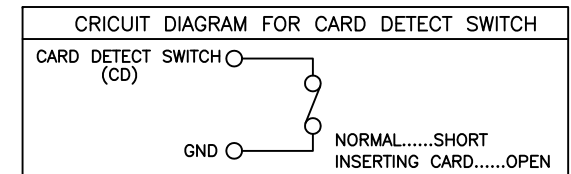


SIM pin Assignment	
PIN#	Name
C1	VCC
C2	RST
C3	CLK
C5	GND
C6	VPP
C7	I/O



TOLERANCES	
X.±0.40	.XX±0.20
.X±0.30	.XXX±0.10

REV.	A	DRAWN BY	Zhong 2017/11/23	TITLE	NANO SIM CARD, 7PIN, PCB MOUNT, SMT, METAL SHIELD, PUSH PUSH TYPE, FEMALE, H=1.35mm				
©	◁	APPROVED BY	Lion 2017/11/23	DRAW NO.	MMCRD-001	UNIT	MM	Sheet	1/2

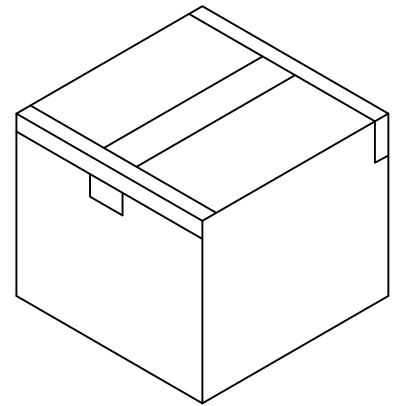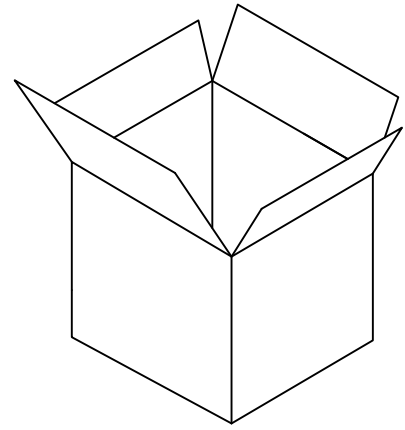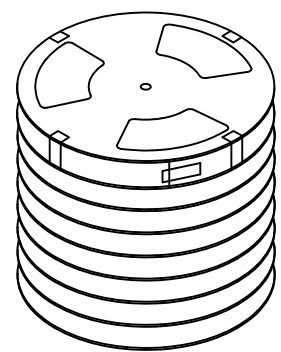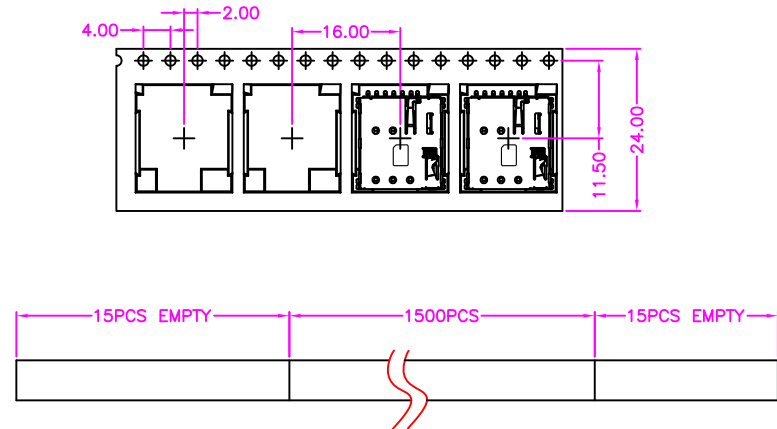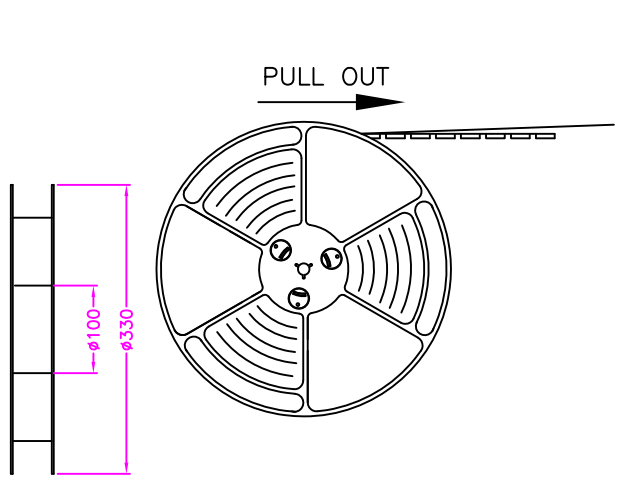

NOTE: 1500PCS/ REEL, 15000PCS/ 10 REEL/ CARTON



TOLERANCES	
X. ± 0.40	.XX ± 0.20
.X ± 0.30	.XXX ± 0.10

REV.	A
©	◁

DRAWN BY	Zhong 2017/11/23
APPROVED BY	Lion 2017/11/23

TITLE	NANO SIM CARD, 7PIN, PCB MOUNT, SMT, METAL SHIELD, PUSH PUSH TYPE, FEMALE, H=1.35mm				
DRAW NO.	MMCRD-001	UNIT	MM	Sheet	2/2