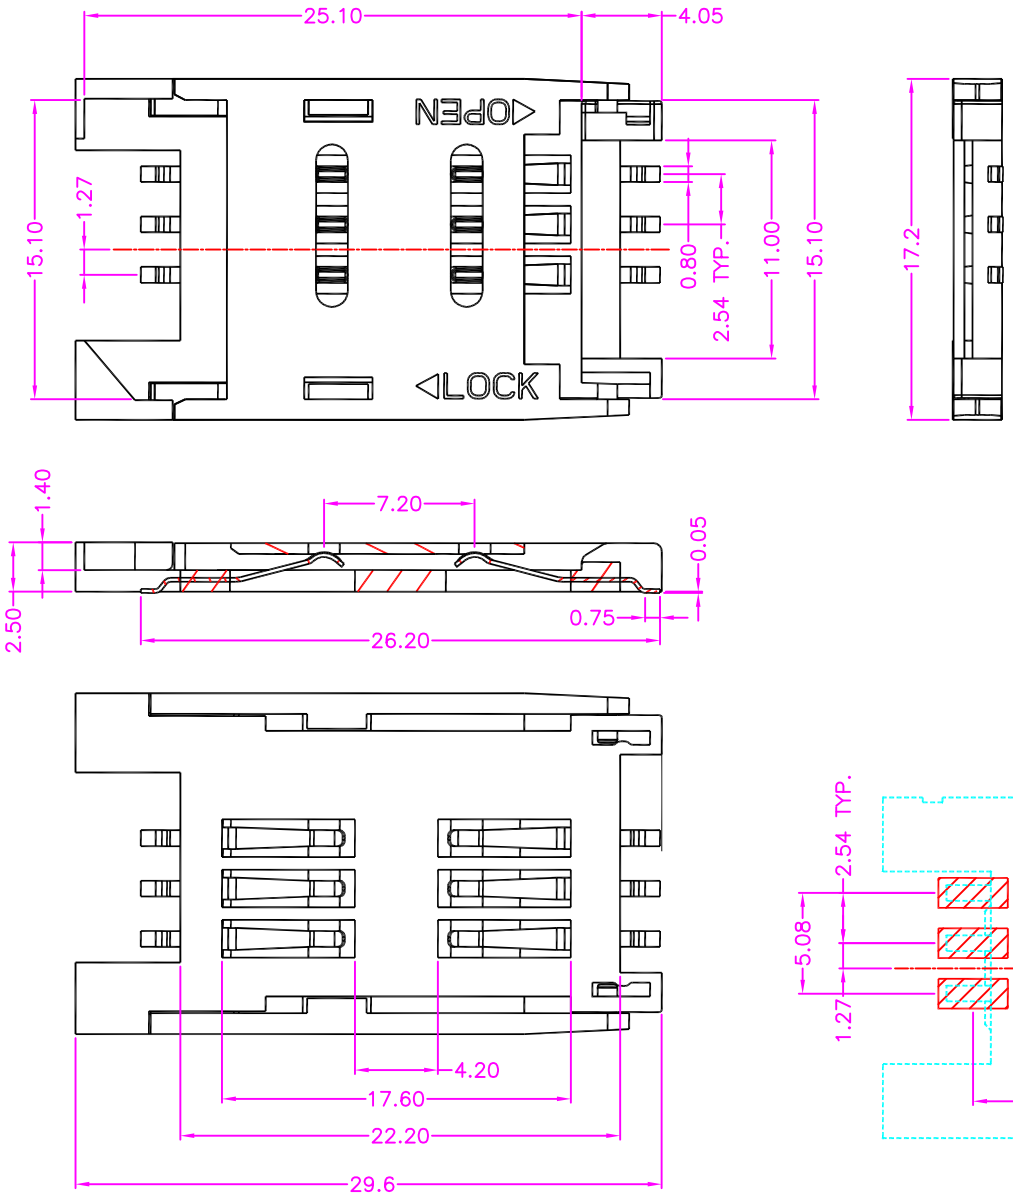

MATERIALS

HOUSING: LCP (UL 94V–0), BLACK
TERMINAL: COPPER ALLOY, GOLD PLATING ON CONTACT AREA
TIN PLATING ON SOLDER TAIL

SPECIFICATION

CURRENT RATING: 0.5 AMP MAX
DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
CONTACT RESISTANCE: 100m OHMS MAX
INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
OPERATION TEMPERATURE: −40°C~+85°C

PART NUMBER:
MMCPF − 0 6 * T − 1 2 1

- SERIES
- NO. OF POS.
- CONTACT PLATED OPTION
  - 1: GOLD FLASH
  - 3: 3u" GOLD
  - 5: 5u" GOLD
  - 7: 15u" GOLD
  - 9: 30u" GOLD
- TIN PLATING ON SOLDER TAIL
- TAPE REEL PACKAGE

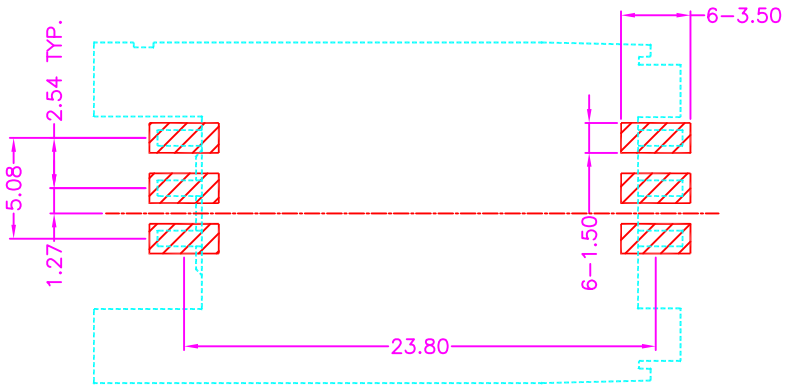

P.C.B LAYOUT
TOP VIEW ±0.05

ZICONN ELECTRONIC CO., LTD. WWW.ZICONN.COM 886-3-4687695	TOLERANCES X.±0.40 .XX±0.20 .X±0.30 .XXX±0.10	REV.	A	DRAWED BY	Zhong 2017/11/29	TITLE	SIM CARD, PCB MOUNT, SMT, ALL PLASTIC, HINGE TYPE, FEMALE, 6 PIN		
		◎		APPROVED BY	Lion 2017/11/29	DRAW NO.	MMCPF−001	UNIT	MM	Sheet	1/1

C0107