
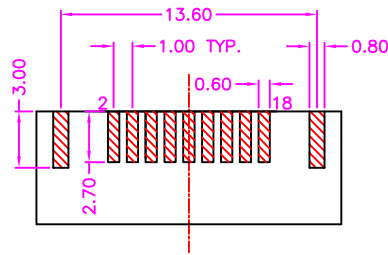
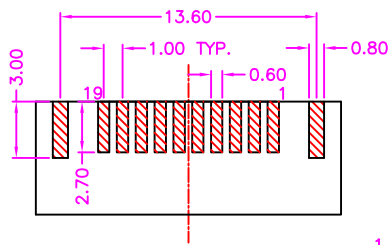


MATERIALS

HOUSING: HI-TEMP. PLASTIC (UL 94V-0)
 SHELL: COPPER ALLOY
 TERMINAL: COPPER ALLOY, GOLD PLATED

SPECIFICATION

CURRENT RATING: 0.5 AMP MAX
 DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
 CONTACT RESISTANCE: 100m OHMS MAX
 INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
 OPERATION TEMPERATURE: -40°C~+85°C

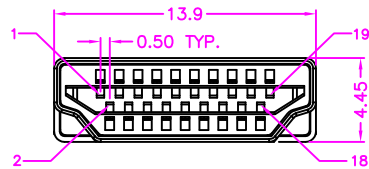

P.C.B LAYOUT ±0.05
 STRADDLE TYPE TOP VIEW

PART NUMBER:

BHDAS - 1 9 * T * * - 2 * 3

SERIES
 NO. OF POS.
 CONTACT PLATED OPTION
 1: GOLD FLASH
 3: 3u" GOLD
 5: 5u" GOLD
 7: 15u" GOLD
 9: 30u" GOLD

PACKAGE OPTION
 1: TRAY
 4: BAG

SHELL PLATING OPTION
 BLANK: NICKEL
 G: GOLD

SHELL OPTION
 BLANK: COPPER ALLOY
 S: SPCC

TIN PLATING ON SOLDER TAIL