


RECESSED MOUNTING CONFIGURATION

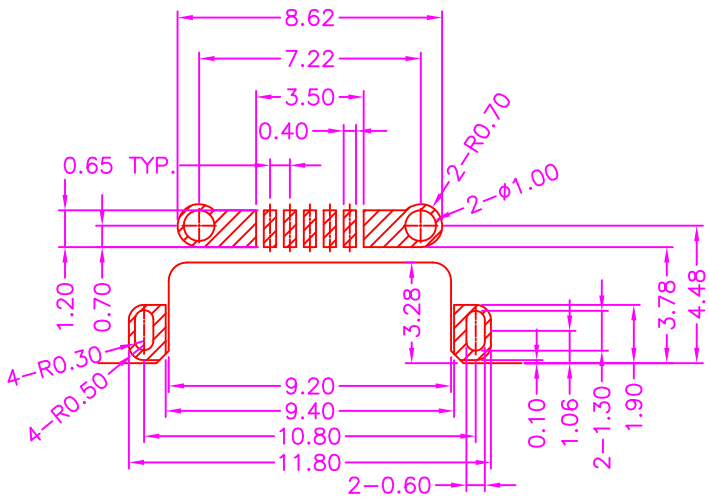

P.C.B. LAYOUT  
TOP VIEW ±0.05

**MATERIALS**

HOUSING: THERMOPLASTIC (UL 94V-0)  
SHELL: STAINLESS STEEL, TIN PLATING  
TERMINAL: COPPER ALLOY, GOLD PLATED

**SPECIFICATION**

CURRENT RATING: 1.8 AMP MAX (ONLY PIN 1, 5), OTHER 1 AMP MAX  
DIELECTRIC WITHSTANDING: 100V AC FOR ONE MINUTE  
CONTACT RESISTANCE: 30m OHMS MAX  
INSULATION RESISTANCE: 100M OHMS MIN AT DC 500V  
OPERATION TEMPERATURE: -40°C~+105°C

**PART NUMBER:**

BUSTU - 0 5 \* - 1 2 1

SERIES

NO. OF POS.

TAPE REEL PACKAGE

**CONTACT PLATED OPTION**

- 1: GOLD FLASH
- 3: 3u" GOLD
- 5: 5u" GOLD
- 6: 10u" GOLD
- 7: 15u" GOLD
- 9: 30u" GOLD

