


P.C.B LAYOUT
TOP VIEW ±0.05

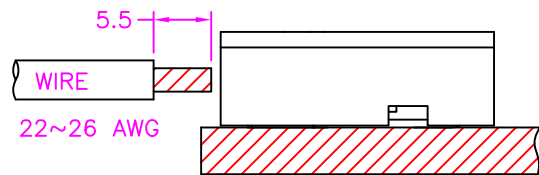

ASSEMBLY

TABLE

POS.	A	B
1	3.00	
2	6.00	3.00
3	9.00	6.00

MATERIALS

HOUSING: HI-TEMP. PLASTIC (UL 94V-0), BEIGE
TERMINAL: COPPER ALLOY, TIN PLATING

SPECIFICATION

CURRENT RATING: 2 AMP MAX
DIELECTRIC WITHSTANDING: 800V AC FOR ONE MINUTE
CONTACT RESISTANCE: 20m OHMS MAX
INSULATION RESISTANCE: 800M OHMS MIN AT DC 500V
OPERATION TEMPERATURE: -40°C~+110°C
APPLICABLE: AWG #22~#26

PART NUMBER:

APKCA - * * T - 1 2 1

SERIES

TAPE REEL PACKAGE

NO. OF POS.
REF. TABLE

TIN PLATING ON TERMINAL