
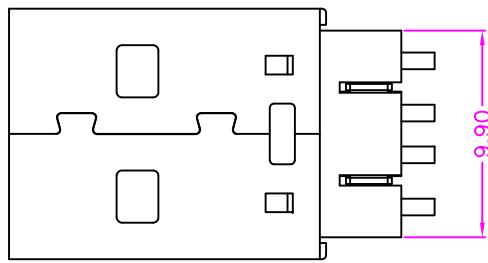



P.C.B. LAYOUT
TOP VIEW ±0.05

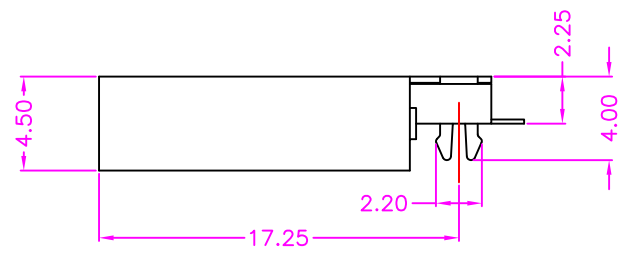

MATERIALS

HOUSING: NYLON 6T (UL 94V-0)
SHELL: SPCC, NICKEL PLATING
TERMINAL: COPPER ALLOY, GOLD PLATED ON CONTACT AREA
TIN PLATING ON SOLDER TAIL

SPECIFICATION

CURRENT RATING: 1 AMP MAX
DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
CONTACT RESISTANCE: 30m OHMS MAX
INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
OPERATION TEMPERATURE: -40°C~+85°C

PART NUMBER:
BUSAD - 0 4 * T - 2 1 1 *
SERIES — NO. OF POS. — CONTACT PLATED OPTION — HOUSING COLOR OPTION
BLANK: BLACK
W: WHITE
TRAY PACKAGE
TIN PLATING ON SOLDER TAIL

1: GOLD FLASH
3: 3u" GOLD
5: 5u" GOLD
6: 10u" GOLD
7: 15u" GOLD
9: 30u" GOLD



TOLERANCES	
X.±0.40	.XX±0.20
.X±0.30	.XXX±0.10

REV.	A	DRAWN BY	Zhong 2018/10/16	TITLE	USB A TYPE, PCB MID MOUNT, SMT, METAL SHIELD, MALE				
		APPROVED BY	Lion 2018/10/16	DRAW NO.	BUSAD-001	UNIT	MM	Sheet	1/1