

**MATERIALS**

HOUSING: HI-TEMP. PLASTIC (UL 94V-0), BLACK  
 SHELL: STAINLESS STEEL  
 TERMINAL: COPPER ALLOY, GOLD PLATING ON CONTACT AREA  
 TIN PLATING ON SOLDER TAIL

**SPECIFICATION**

CURRENT RATING: 0.5 AMP MAX  
 DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE  
 CONTACT RESISTANCE: 100m OHMS MAX  
 INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V  
 OPERATION TEMPERATURE: -40°C~+85°C

**PART NUMBER:**

MMCPF - 0 6 \* T - 1 2 2


SERIES ——— NO. OF POS. ———

TIN PLATING ON SOLDER TAIL

CONTACT PLATED OPTION

1: GOLD FLASH  
 3: 3u" GOLD  
 5: 5u" GOLD  
 7: 15u" GOLD  
 9: 30u" GOLD

TAPE REEL PACKAGE

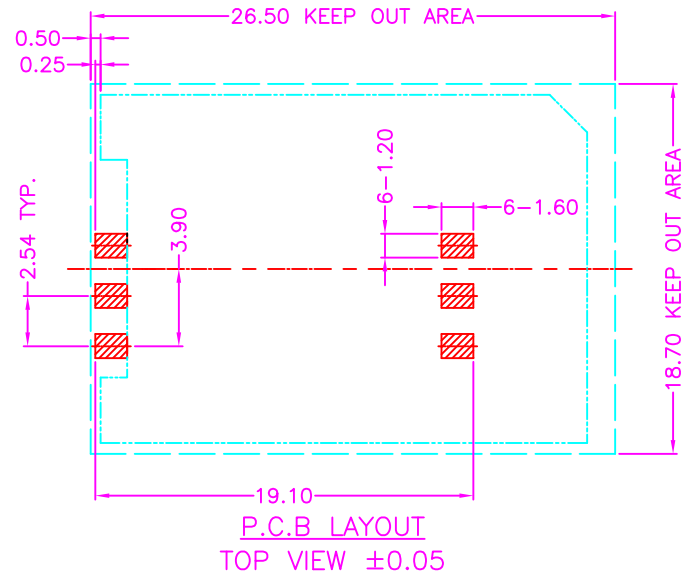

**TOLERANCES**

X.±0.40	.XX±0.20
.X±0.30	.XXX±0.10

REV.	A	DRAWN BY	Zhong 2019/3/5	TITLE	SIM CARD, PCB MOUNT, SMT, ALL PLASTIC, HINGE TYPE, FEMALE, 6 PIN				
		APPROVED BY	Lion 2019/3/5	DRAW NO.	MMCPF-002	UNIT	MM	Sheet	1/1