
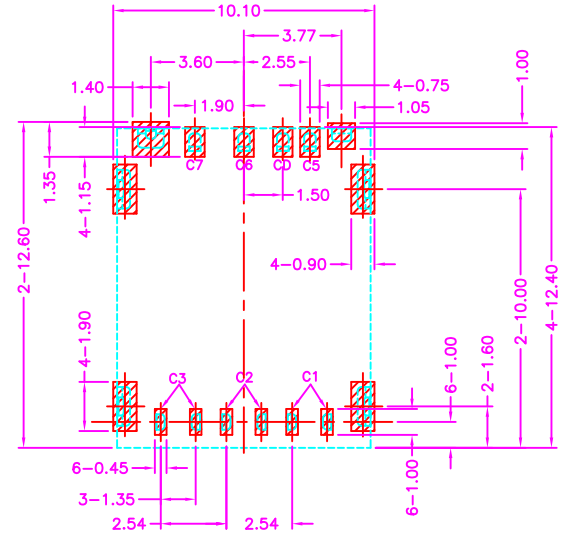


MATERIALS

HOUSING: LCP (UL 94V-0), BLACK
 SHELL: STAINLESS STEEL, NICKEL PLATING
 SOLDER PAD: STAINLESS STEEL, GOLD FLASH
 TERMINAL: COPPER ALLOY, GOLD PLATING


SPECIFICATION

CURRENT RATING: 0.5 AMP MAX
 DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
 CONTACT RESISTANCE: 100m OHMS MAX
 INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
 OPERATION TEMPERATURE: -40°C~+85°C

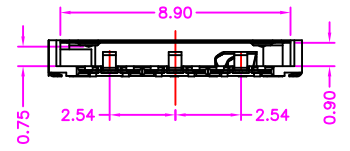

SIM CARD PIN ASSIGNMENTS

PIN	Name
C1	Vcc
C2	RST
C3	CLK
C4	Reserved
C5	GND
C6	Vpp
C7	I/O
C8	Reserved



PART NUMBER:

MMCRB - 0 7 * - 1 2 4

SERIES ——— NO. OF POS. ——— TAPE REEL PACKAGE

CONTACT PLATED OPTION

- 1: GOLD FLASH
- 3: 3u" GOLD
- 5: 5u" GOLD
- 6: 10u" GOLD
- 7: 15u" GOLD
- 9: 30u" GOLD




TOLERANCES

X.±0.40	.XX±0.20
.X±0.30	.XXX±0.10

REV.	A	DRAWN BY	Zhong 2018/11/20	TITLE	NANO SIM CARD, 7PIN, PCB MOUNT, SMT, METAL SHIELD H=1.40mm, FEMALE				
		APPROVED BY	Lion 2018/11/20	DRAW NO.	MMCRB-004	UNIT	MM	Sheet	1/2


User Direction of Unreeling

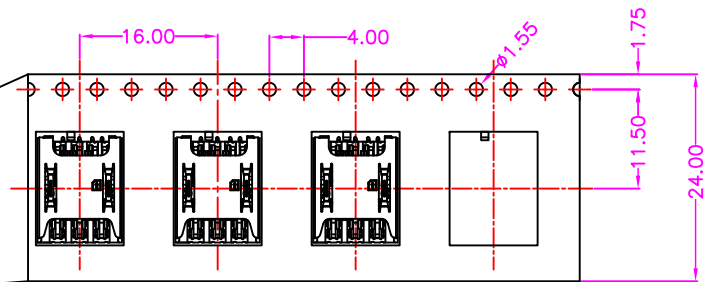

COVER TAPE PEELING ANGLE: 165°~180°
PEELING FORCE: 20~130g

CARRIER TAPE


User Direction of Unreeling

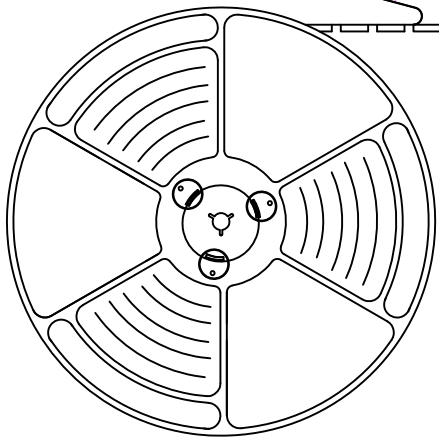

8-REEL

2-PEARL WOOL

CARTON
335*335*250 K=K



NOTE: 1800PCS/ REEL, 14400PCS/ 8 REEL/CARTON



TOLERANCES	
X.±0.40	.XX±0.20
.X±0.30	.XXX±0.10

REV.	A	DRAWN BY	Zhong 2018/11/20	TITLE	NANO SIM CARD, 7PIN, PCB MOUNT, SMT, METAL SHIELD H=1.40mm, FEMALE				
		APPROVED BY	Lion 2018/11/20	DRAW NO.	MMCRB-004	UNIT	MM	Sheet	2/2

MMCRB-004	UNIT	MM	Sheet	2/2
-----------	------	----	-------	-----