

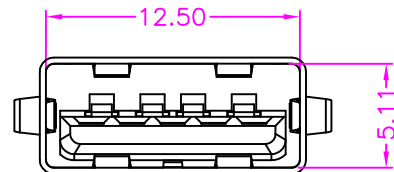
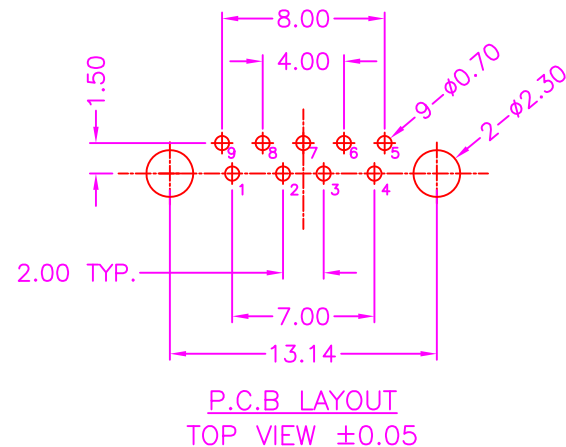
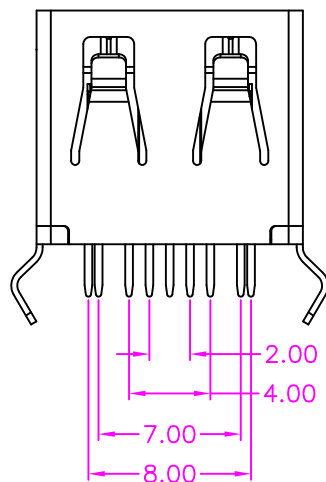


A

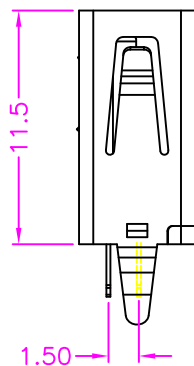

B

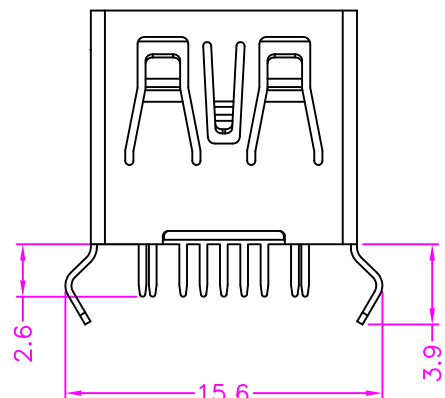

C

MATERIALS

HOUSING: HI-TEMP. PLASTIC (UL 94V-0), BLUE
 SHELL: COPPER ALLOY, NICKEL PLATING
 TERMINAL: COPPER ALLOY, GOLD PLATED ON CONTACT AREA
 TIN PLATING ON SOLDER TAIL

SPECIFICATION

CURRENT RATING: 1.5 AMP MAX
 DIELECTRIC WITHSTANDING: 100V AC FOR ONE MINUTE
 CONTACT RESISTANCE: 30m OHMS MAX
 INSULATION RESISTANCE: 100M OHMS MIN AT DC 500V
 OPERATION TEMPERATURE: -40°C~+85°C

PART NUMBER:

BUSEA - 0 9 * T - 1 1 4

SERIES

NO. OF POS.

CONTACT PLATED OPTION

TRAY PACKAGE

TIN PLATING ON SOLDER TAIL


- 1: GOLD FLASH
- 3: 3u" GOLD
- 5: 5u" GOLD
- 6: 10u" GOLD
- 7: 15u" GOLD
- 9: 30u" GOLD

Pin NUMBER	SIGNAL NAME
1	VBUS
2	D-
3	D+
4	GND
5	StdA_SSRX-
6	StdA_SSRX+
7	GND_DRAIN
8	StdA_SSTX-
9	StdA_SSTX+
Shell	Shield

D



TOLERANCES	
X.±0.40	.XX±0.20
.X±0.30	.XXX±0.10



REV. A
 DRAWN BY Zhong 2020/3/11
 APPROVED BY Lion 2020/3/11

TITLE: USB 3.0 A TYPE, PCB MOUNT, VERTICAL, METAL SHIELD, FEMALE, H=11.5mm
 DRAW NO. BUSEA-004
 UNIT
 MM
 Sheet
 1/1