

MATERIALS

HOUSING: HI-TEMP. PLASTIC (UL 94V-0), BLACK
 SHELL: STAINLESS STEEL, NICKEL PLATING
 TERMINAL: COPPER ALLOY, GOLD PLATED

SPECIFICATION

CURRENT RATING: 1.8 AMP MAX (ONLY PIN 1, 5), OTHER 1 AMP MAX
 DIELECTRIC WITHSTANDING: 100V AC FOR ONE MINUTE
 CONTACT RESISTANCE: 30m OHMS MAX
 INSULATION RESISTANCE: 100M OHMS MIN AT DC 500V
 OPERATION TEMPERATURE: -40°C~+105°C

PART NUMBER:

BUSTE - 0 5 * - 1 * 1

SERIES







NO. OF POS.

PACKAGE OPTION

2: TAPE REEL
 3: TUBE

CONTACT PLATED OPTION

- 1: GOLD FLASH
- 3: 3u" GOLD
- 5: 5u" GOLD
- 7: 15u" GOLD
- 9: 30u" GOLD

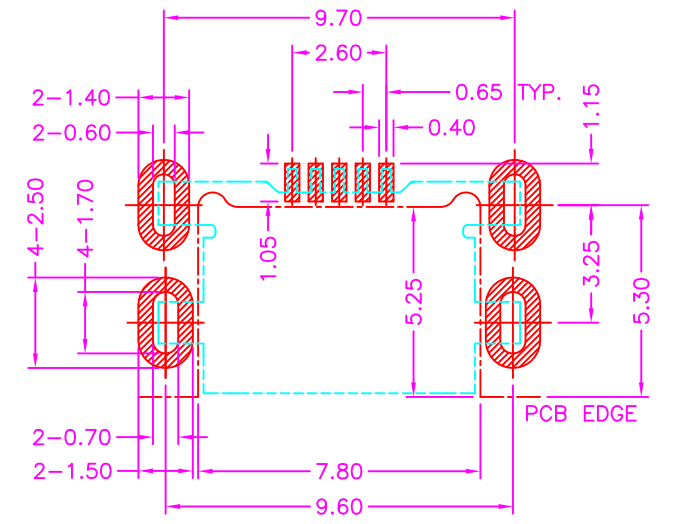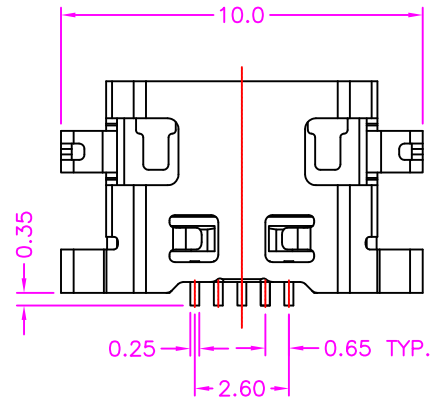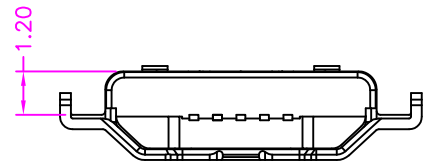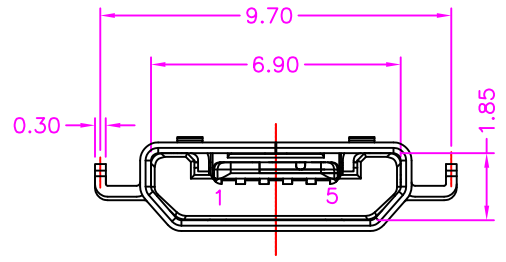

P.C.B. LAYOUT
 TOP VIEW ±0.05



| TOLERANCES | |
|------------|-----------|
| X.±0.40 | .XX±0.20 |
| .X±0.30 | .XXX±0.10 |

| | | | | | | | | | |
|------|---|-------------|-----------------|----------|---|------|----|-------|-----|
| REV. | A | DRAWN BY | Zhong 2020/5/22 | TITLE | MICRO USB B TYPE, PCB MID MOUNT REVERSE TYPE, SMT, METAL SHIELD, FEMALE | | | | |
| | | APPROVED BY | Lion 2020/5/22 | DRAW NO. | BUSTE-001 | UNIT | MM | Sheet | 1/1 |