


DB9 M/F ADAPTER PIN OUT

9 MALE		9 FEMALE
2	-----	3
3	-----	2
4	-----	1+6
5	-----	5
1+6	-----	4
7	-----	8
8	-----	7
G	-----	G

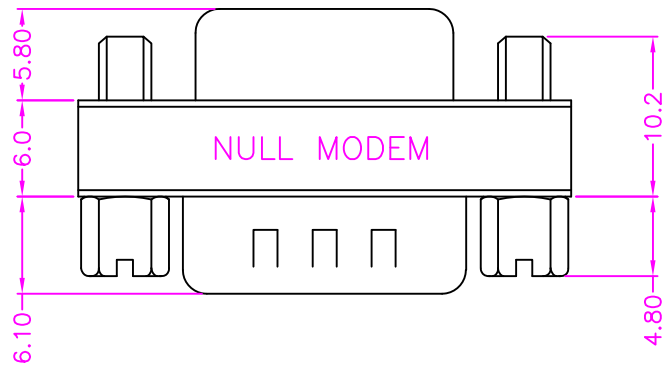


MATERIALS

HOUSING: PBT (UL 94V-0)
 SHELL: COPPER ALLOY, TIN PLATING
 SCREW: COPPER ALLOY, NICKEL PLATING
 TERMINAL: COPPER ALLOY, GOLD PLATING

SPECIFICATION

CURRENT RATING: 3 AMP MAX
 DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
 CONTACT RESISTANCE: 30m OHMS MAX
 INSULATION RESISTANCE: 500M OHMS MIN AT DC 500V
 OPERATION TEMPERATURE: -40°C~+105°C

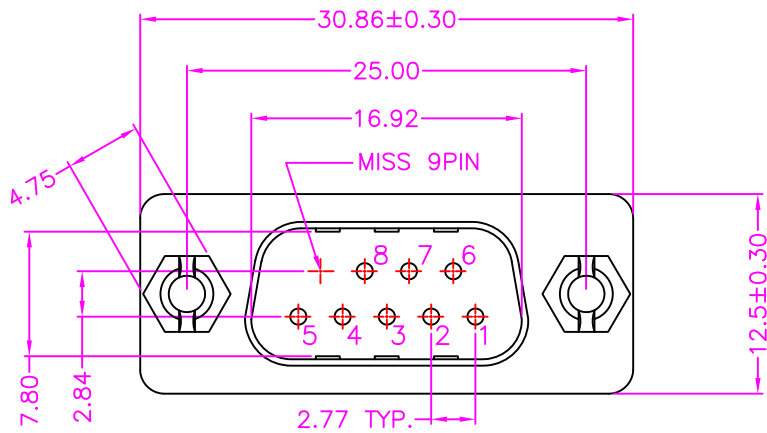

PART NUMBER:

SADBDB - 0 9 1 - 4 1 2

SERIES

NO. OF POS.

TRAY PACKAGE

GOLD FLASH ON TERMINAL