


INFORMATION

- P1: SATA 7PIN, FEMALE, PBT, BLACK IN INSULATOR COLOR
GOLD PLATING ON TERMINAL
- P2: SATA 7PIN, WITH SUS SPRING, FEMALE, PBT, BLACK IN INSULATOR COLOR
GOLD PLATING ON TERMINAL
- SATA CABLE: UL2725 (26AWGx2C+AL)x2C+4Dx28AWG JACKET,
RED PVC OD:2.20x7.80mm

PIN ASSIGNMENT

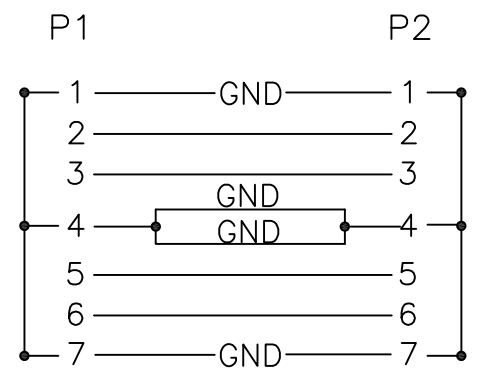

PART NUMBER:
LWSASA - G 0 - 7 3

SERIES



TOLERANCES	
X.±0.40	.XX±0.20
.X±0.30	.XXX±0.10

REV.	A	DRAWN BY	Zhong 2022/1/1
		APPROVED BY	Lion 2022/1/1

TITLE	SATA 7PIN VERTICAL FEMALE TO SATA 7PIN R/A FEMALE, L=70mm, CABLE				
DRAW NO.	LWSASA-003	UNIT	MM	Sheet	1/1