
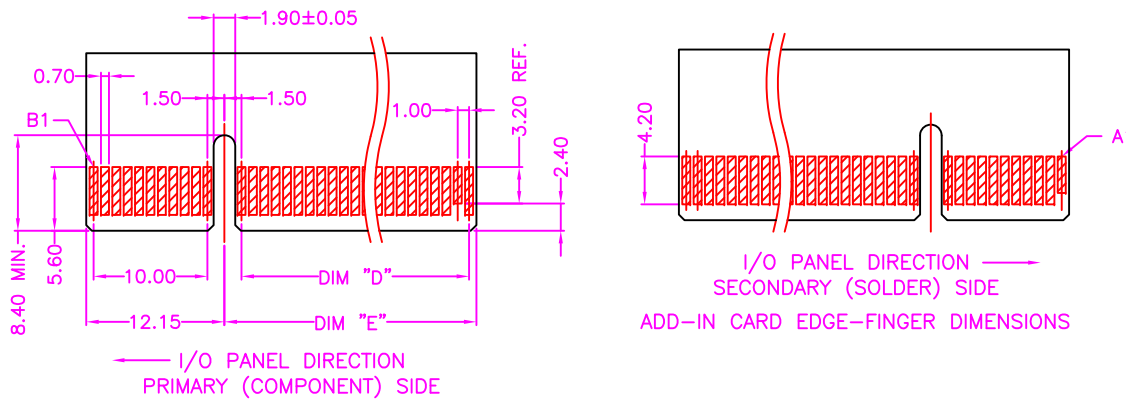
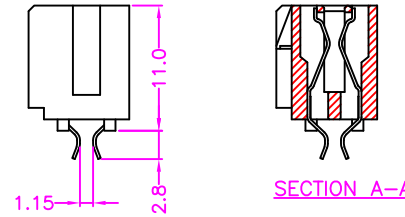
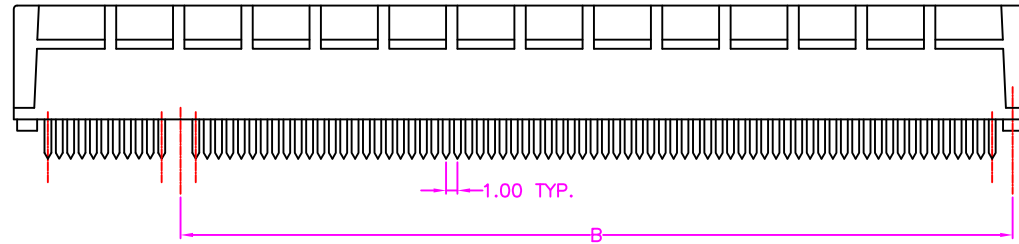


MATERIALS

HOUSING: PA66 (UL 94V-0), BLACK
 TERMINAL: COPPER ALLOY, GOLD PLATED ON CONTACT AREA
 TIN PLATING ON SOLDER TAIL

SPECIFICATION

CURRENT RATING: 1.1 AMP MAX
 DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
 CONTACT RESISTANCE: 30m OHMS MAX
 INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
 OPERATION TEMPERATURE: -55°C~+85°C

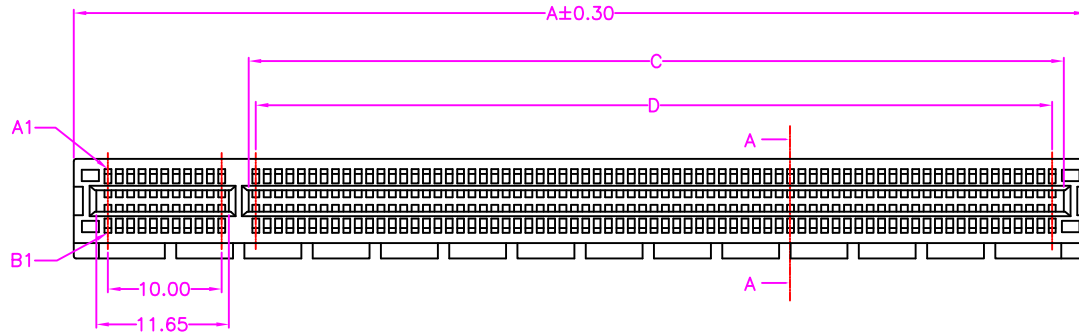

PART NUMBER:
MCEEM - * * * * T - 1 3 A

SERIES ——— * * * *
 NO. OF POS. REF TABLE ——— T
 CONTACT PLATED OPTION ——— 1 3 A
 TUBE PACKAGE ——— A
 TIN PLATING ON SOLDER TAIL ———

- CONTACT PLATED OPTION
- 1: GOLD FLASH
 - 3: 3u" GOLD
 - 5: 5u" GOLD
 - 6: 10u" GOLD
 - 7: 15u" GOLD
 - 9: 30u" GOLD

TABLE

DIMENSIONS					
POS.	A	B	C	D	E
036	25.00	9.15	7.65	6.00	8.15
064	39.00	23.15	21.65	20.00	22.15
098	56.00	40.15	38.65	37.00	39.15
164	89.00	73.15	71.65	70.00	72.15



TOLERANCES
 X.±0.40 .XX±0.20
 .X±0.30 .XXX±0.10

REV. A

DRAWN BY Zhong 2022/1/17
 APPROVED BY Lion 2022/1/17

TITLE: PCI EXPRESS, 1.00mm PITCH, PCB MOUNT, STRADDLE MOUNT
 1 KEY, WITH POST, FEMALE

DRAW NO. MCEEM-010 UNIT MM Sheet 1/1