


MATERIALS

INSULATOR: TEFLON (UL 94V-0), WHITE
 HOUSING: ZINC, NICKEL PLATING
 CENTER CONTACT: COPPER ALLOY, GOLD PLATED
 OUTER CONTACT: COPPER ALLOY, NICKEL PLATING

SPECIFICATION

IMPEDANCE: 75 OHM
 FREQUENCY RANGE: 0 ~ 3.6 GHz
 RETURN LOSS: -15dB Min. @ 0 ~ 3.6 GHz
 DIELECTRIC WITHSTANDING: 1500V AC FOR ONE MINUTE
 INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
 OPERATION TEMPERATURE: -65°C~+165°C

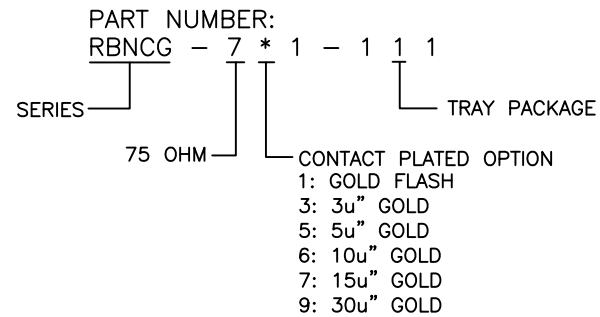

TOLERANCES	
X.±0.40	.XX±0.20
.X±0.30	.XXX±0.10

REV.	A	DRAWN BY	Zhong 2021/6/20	TITLE
		APPROVED BY	Lion 2021/6/20	DRAW NO.

SD-HDI 3.5G BNC, PCB MOUNT, R/A, WITH POST, FEMALE				
RBNCG-001	UNIT	MM	Sheet	1/1