



A


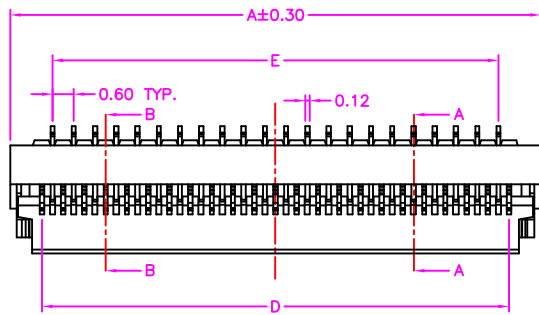


A=(NUMBER OF POS.)x0.30+1.50
 B=(NUMBER OF POS.)x0.30+1.00
 C=(NUMBER OF POS.)x0.30+0.40
 D=(NUMBER OF POS.)x0.30-0.30
 E=(NUMBER OF POS.)x0.30-0.90

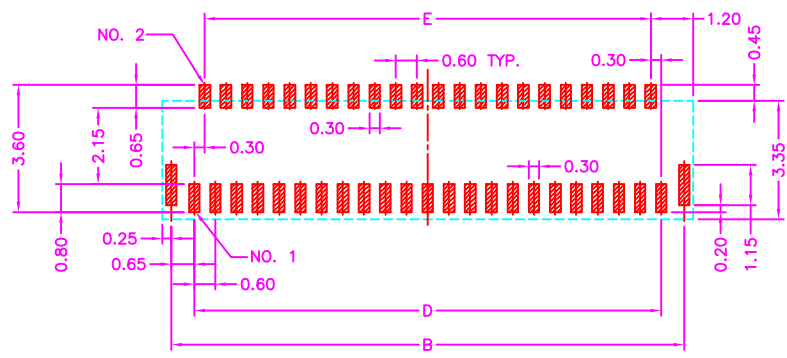

P.C.B LAYOUT
TOP VIEW ±0.05

B

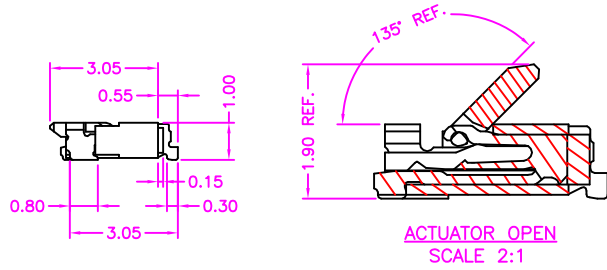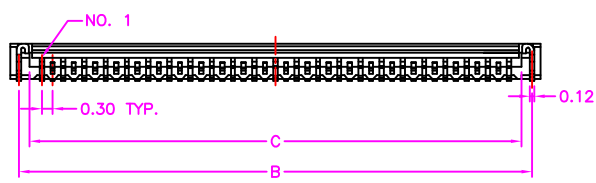




MATERIALS

HOUSING: HI-TEMP. PLASTIC (UL 94V-0)
 ACTUATOR: HI-TEMP. PLASTIC (UL 94V-0)
 SOLDER PAD: COPPER ALLOY, TIN PLATING
 TERMINAL: COPPER ALLOY, GOLD PLATED

SPECIFICATION

CURRENT RATING: 0.2 AMP MAX
 DIELECTRIC WITHSTANDING: 250V AC FOR ONE MINUTE
 CONTACT RESISTANCE: 80m OHMS MAX
 INSULATION RESISTANCE: 50M OHMS MIN AT DC 250V
 OPERATION TEMPERATURE: -40°C~+85°C

C

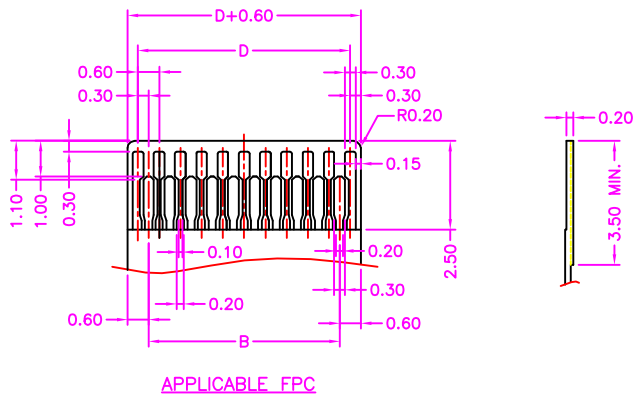

PART NUMBER:

AFPGF - 4 * * * - 1 2 4

SERIES ————
 EASY NO ————
 NO. OF POS. (11 ~ 73 POS.) ————
 TAPE REEL PACKAGE ————
 TERMINAL PLATED OPTION
 1: GOLD FLASH
 3: 3u" GOLD
 5: 5u" GOLD
 6: 10u" GOLD
 7: 15u" GOLD
 9: 30u" GOLD

D



TOLERANCES	
X.±0.40	.XX±0.20
.X±0.30	.XXX±0.10

REV.	A	DRAWN BY	Zhong 2021/7/24	TITLE	FPC 0.30mm PITCH, PCB MOUNT, SMT, EASY NO, ZIF, H=1.00mm, FEMALE				
		APPROVED BY	Lion 2021/7/24	DRAW NO.	AFPGF-004	UNIT	MM	Sheet	1/1

1	2	3	4	5	6
---	---	---	---	---	---