

MATERIALS




HOUSING: HI-TEMP. PLASTIC (UL 94V-0), BLACK
 TERMINAL: COPPER ALLOY

SPECIFICATION


CURRENT RATING: 1 AMP MAX
 DIELECTRIC WITHSTANDING: 800V AC FOR ONE MINUTE
 INSULATION RESISTANCE: 5000M OHMS MIN AT DC 500V
 OPERATION TEMPERATURE: -55°C~+105°C

TABLE

| PIN | A | B |
|-----|-------|-------|
| 04 | 4.00 | 2.00 |
| 06 | 6.00 | 4.00 |
| 08 | 8.00 | 6.00 |
| 10 | 10.00 | 8.00 |
| 12 | 12.00 | 10.00 |
| 14 | 14.00 | 12.00 |
| 16 | 16.00 | 14.00 |
| 18 | 18.00 | 16.00 |
| 20 | 20.00 | 18.00 |
| 22 | 22.00 | 20.00 |
| 24 | 24.00 | 22.00 |
| 26 | 26.00 | 24.00 |
| 28 | 28.00 | 26.00 |
| 30 | 30.00 | 28.00 |
| 32 | 32.00 | 30.00 |
| 34 | 34.00 | 32.00 |
| 36 | 36.00 | 34.00 |
| 38 | 38.00 | 36.00 |
| 40 | 40.00 | 38.00 |
| 42 | 42.00 | 40.00 |
| 44 | 44.00 | 42.00 |
| 46 | 46.00 | 44.00 |
| 48 | 48.00 | 46.00 |
| 50 | 50.00 | 48.00 |
| 52 | 52.00 | 50.00 |
| 54 | 54.00 | 52.00 |
| 56 | 56.00 | 54.00 |
| 58 | 58.00 | 56.00 |
| 60 | 60.00 | 58.00 |
| 62 | 62.00 | 60.00 |
| 64 | 64.00 | 62.00 |
| 66 | 66.00 | 64.00 |
| 68 | 68.00 | 66.00 |
| 70 | 70.00 | 68.00 |
| 72 | 72.00 | 70.00 |
| 74 | 74.00 | 72.00 |
| 76 | 76.00 | 74.00 |
| 78 | 78.00 | 76.00 |
| 80 | 80.00 | 78.00 |

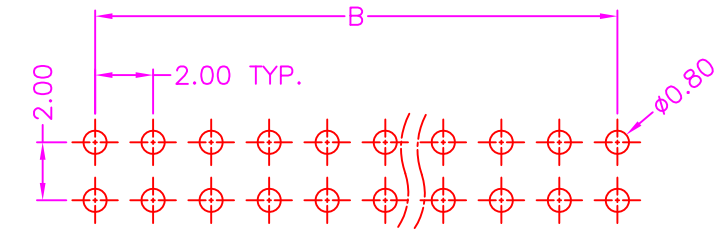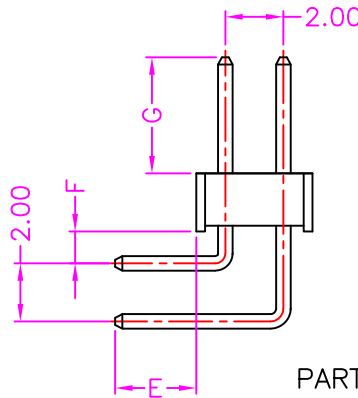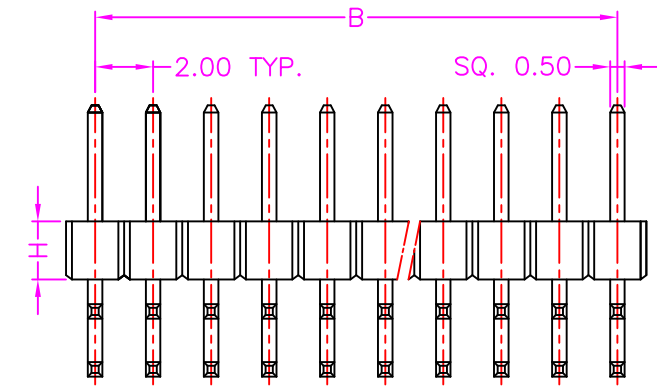

**P.C.B LAYOUT
 TOP VIEW ±0.05**

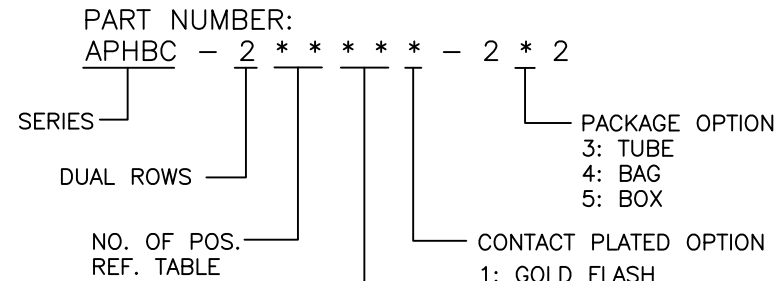

- LENGTH OPTION**
- 01: E=2.80mm, F=1.10mm, G=4.00mm, H=2.00mm
 - 02: E=3.00mm, F=1.10mm, G=3.50mm, H=2.00mm
 - 03: E=2.00mm, F=1.10mm, G=4.00mm, H=2.00mm
 - 04: E=2.80mm, F=1.55mm, G=4.00mm, H=2.00mm
 - 05: E=3.00mm, F=1.50mm, G=4.00mm, H=2.00mm