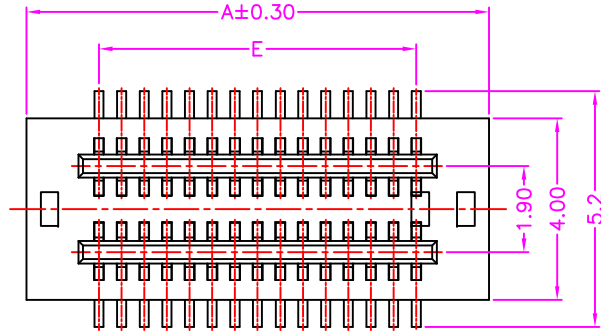


$$A = (\text{NUMBER OF POS. PER ROW} \times 0.50) + 2.70$$

$$B = (\text{NUMBER OF POS. PER ROW} \times 0.50) + 1.40$$

$$C = (\text{NUMBER OF POS. PER ROW} \times 0.50) + 0.40$$



$$D = (\text{NUMBER OF POS. PER ROW} - 1) \times 0.50$$

MATERIALS

HOUSING: HI-TEMP. PLASTIC (UL 94V-0), BLACK
TERMINAL: COPPER ALLOY, GOLD PLATED

SPECIFICATION

CURRENT RATING: 0.5 AMP MAX
DIELECTRIC WITHSTANDING: 250V AC FOR ONE MINUTE
CONTACT RESISTANCE: 50m OHMS MAX
INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
OPERATION TEMPERATURE: -40°C~+80°C

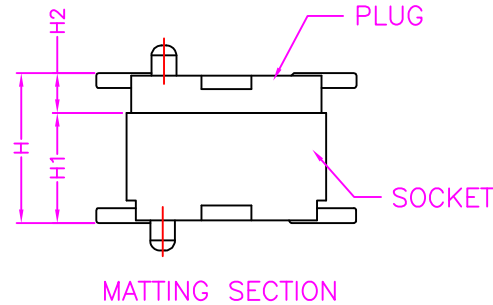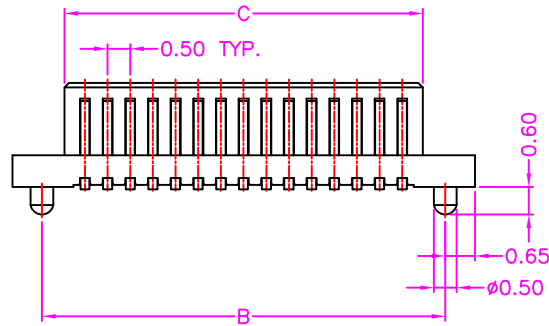

MATING SECTION

PART NUMBER:
ABBDB - * * * - 2 2 2 *

SERIES

NO. OF POS.
(08 POS. ~ 100 POS.)

"H" LENGTH OPTION
REF TABLE


TAPE REEL PACKAGE

CONTACT PLATED OPTION

- 1: GOLD FLASH
- 3: 3u" GOLD
- 5: 5u" GOLD
- 7: 15u" GOLD
- 9: 30u" GOLD

TABLE

P/N	H	FEMALE H1		MALE H2		F
A	3.00	2.20		0.80		1.60
B	3.50	2.20		1.30		1.60
C	4.00	3.00		1.00		1.90
D	4.50	3.50		1.00		1.90
E	5.00	4.00	3.00	1.00	2.00	1.90
F	5.50	4.50		1.00		1.90
G	6.00	4.00		2.00		1.90
H	6.50	4.50		2.00		1.90

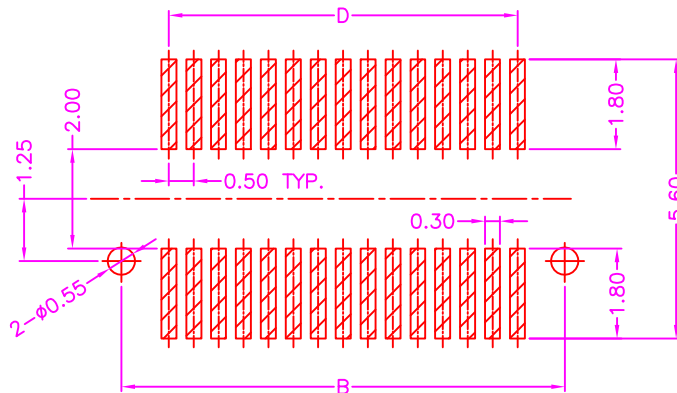

P.C.B LAYOUT
TOP VIEW ±0.05