


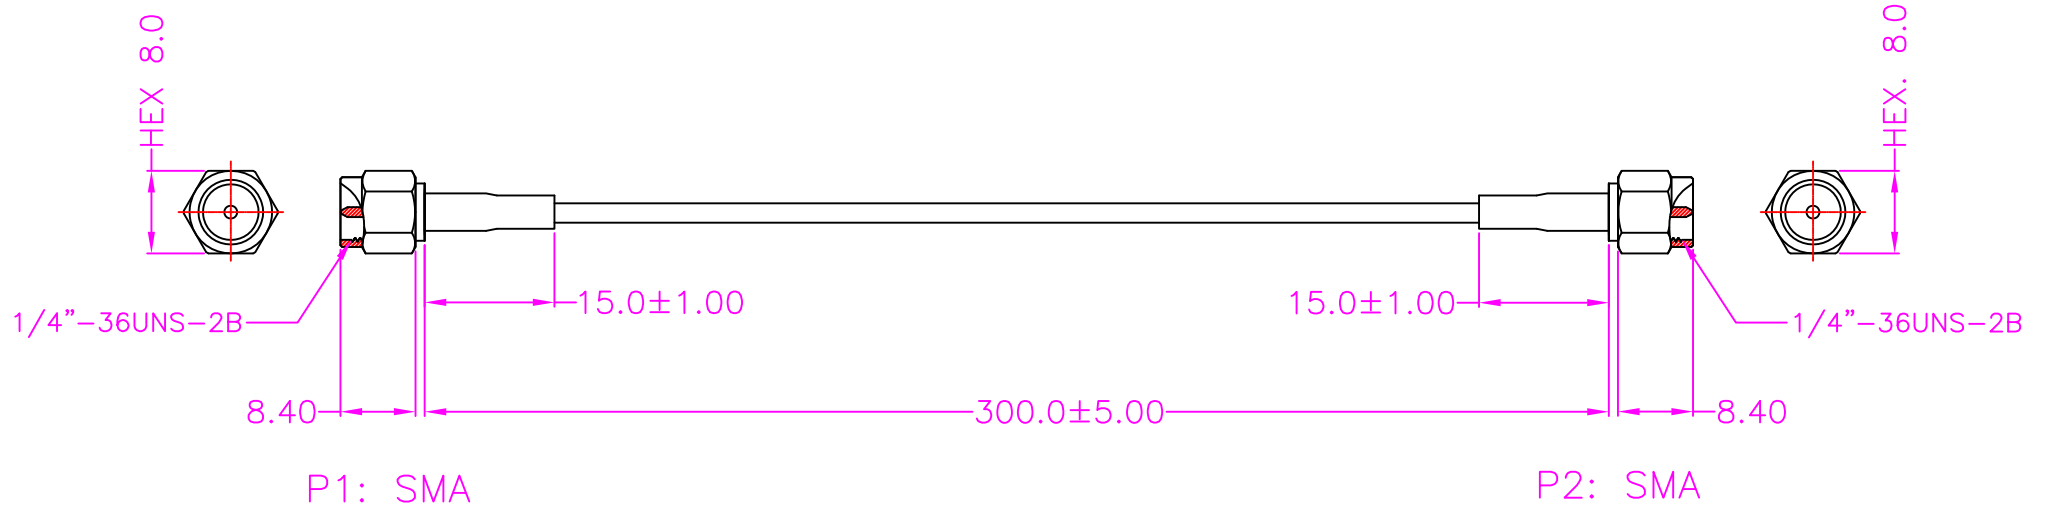

INFORMATION

P1: SMA, RG178, WHITE IN INSULATOR COLOR, GOLD PLATED ON SHELL
GOLD PLATING ON CONTACT AREA

P2: SMA, RG178, WHITE IN INSULATOR COLOR, GOLD PLATED ON SHELL
GOLD PLATING ON CONTACT AREA

CABLE: 1.78mm, BROWN

HEAT SHRINK TUBE: $\varnothing$ 2.50mmx15.0mm THERMOPLASTIC, BLACK

PART NUMBER:

LSASA - * 1 - 6 1

SERIES

CONTACT PLATED OPTION

- 1: GOLD FLASH
- 3: 3u" GOLD
- 5: 5u" GOLD
- 6: 10u" GOLD
- 7: 15u" GOLD
- 9: 30u" GOLD

SPECIFICATION

IMPEDANCE: 50 OHMS

FREQUENCY RANGE: 0-6 GHz

VSWR: 2.00 MAX