







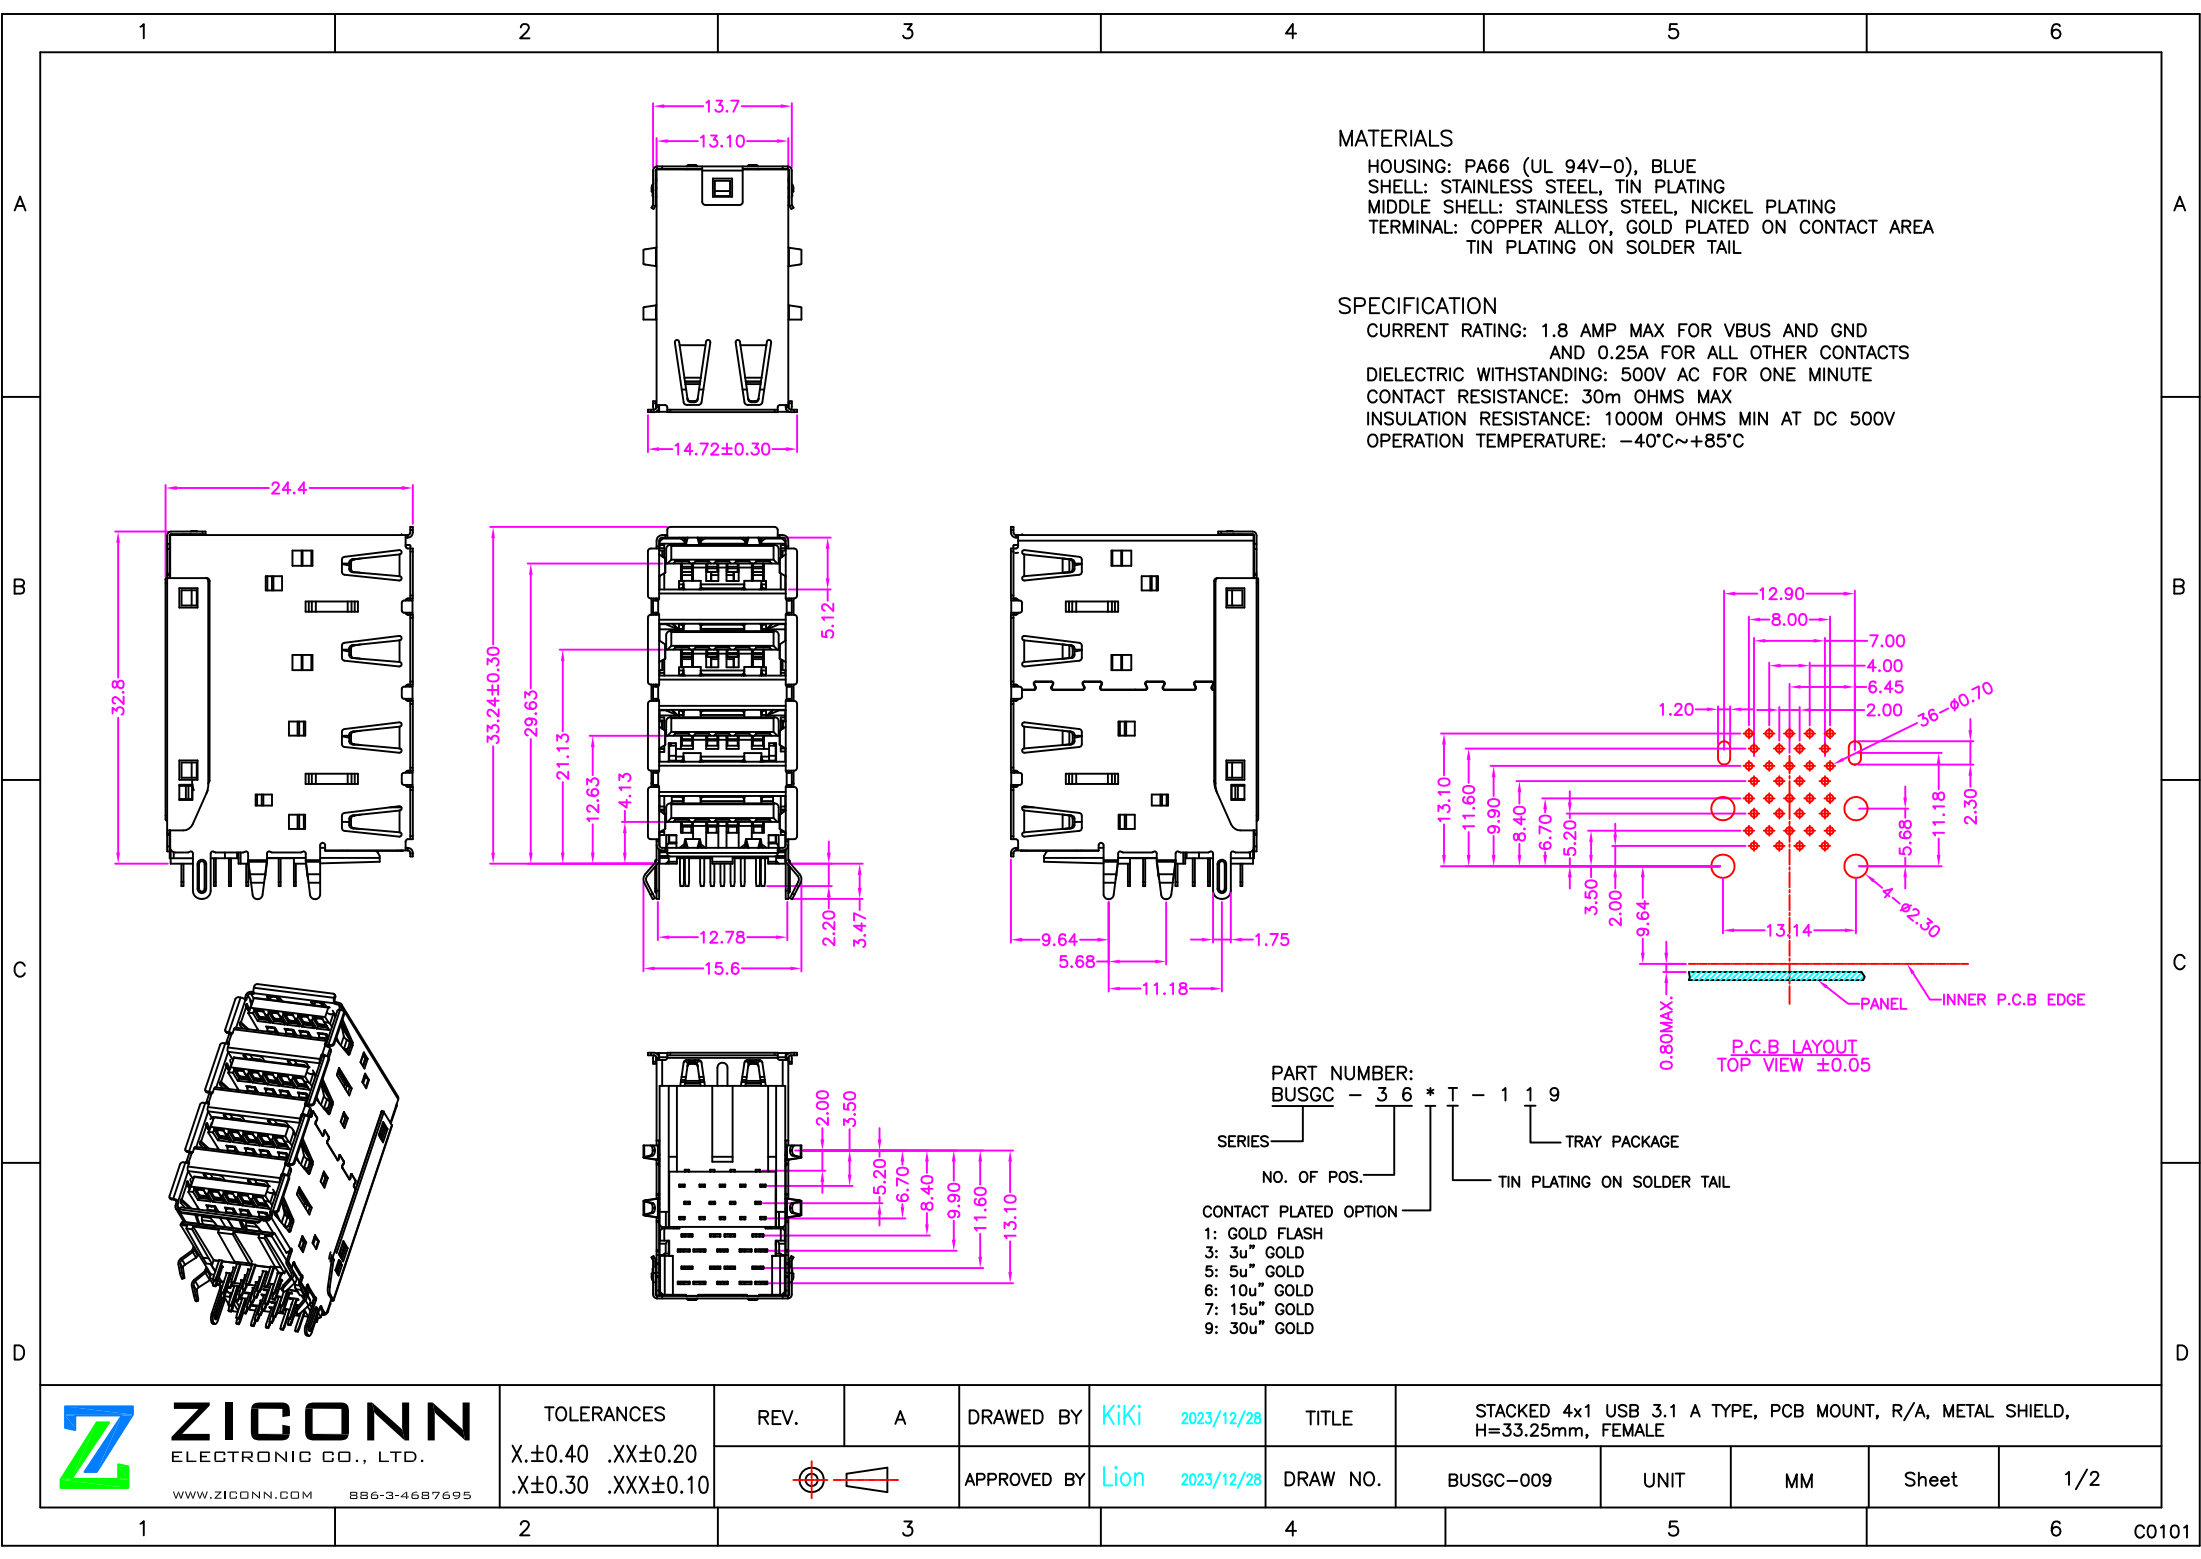


MATERIALS
HOUSING: PA66 (UL 94V-0), BLUE
SHELL: STAINLESS STEEL, TIN PLATING
MIDDLE SHELL: STAINLESS STEEL, NICKEL PLATING
TERMINAL: COPPER ALLOY, GOLD PLATED ON CONTACT AREA
TIN PLATING ON SOLDER TAIL



SPECIFICATION
CURRENT RATING: 1.8 AMP MAX FOR VBUS AND GND
AND 0.25A FOR ALL OTHER CONTACTS
DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
CONTACT RESISTANCE: 30m OHMS MAX
INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
OPERATION TEMPERATURE: -40°C~+85°C

PART NUMBER:
BUSGC - 3 6 * T - 1 1 9
SERIES
NO. OF POS.
CONTACT PLATED OPTION
1: GOLD FLASH
3: 3u" GOLD
5: 5u" GOLD
6: 10u" GOLD
7: 15u" GOLD
9: 30u" GOLD
TIN PLATING ON SOLDER TAIL
TRAY PACKAGE

P.C.B. LAYOUT
TOP VIEW ±0.05



PE BAG



NOTE: 50PCS/ TRAY, 1000PCS/ 20 TRAY/ CARTON