

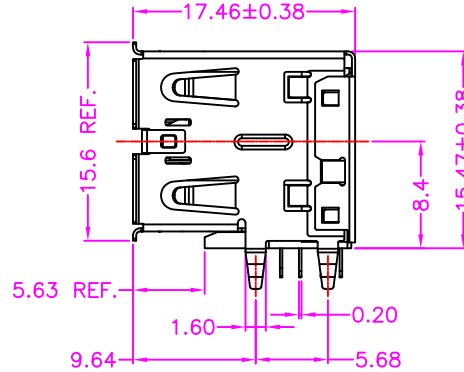


MATERIALS

HOUSING: LCP (UL 94V-0), BLUE
SHELL: STAINLESS STEEL, NICKEL PLATING
MIDDLE SHELL: STAINLESS STEEL, NICKEL PLATING
TERMINAL: COPPER ALLOY, GOLD PLATED ON CONTACT AREA
TIN PLATING ON SOLDER TAIL

SPECIFICATION

CURRENT RATING: 1.8 AMP MAX FOR VBUS AND GND
AND 0.25A FOR ALL OTHER CONTACTS
DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
CONTACT RESISTANCE: 30m OHMS MAX
INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
OPERATION TEMPERATURE: -40°C~+85°C

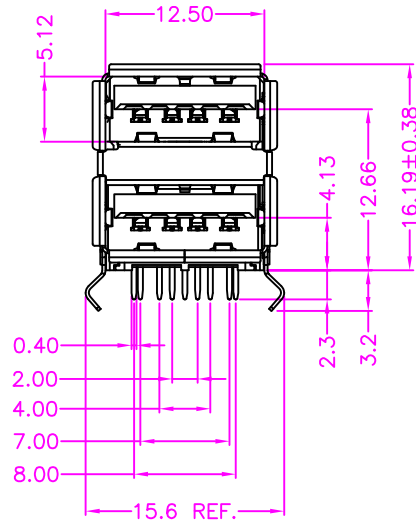

PART NUMBER:
BUSGC - 1 8 * T - 1 1 A
SERIES NO. OF POS. TRAY PACKAGE
CONTACT PLATED OPTION
1: GOLD FLASH
3: 3u" GOLD
5: 5u" GOLD
6: 10u" GOLD
7: 15u" GOLD
9: 30u" GOLD
TIN PLATING ON SOLDER TAIL

