

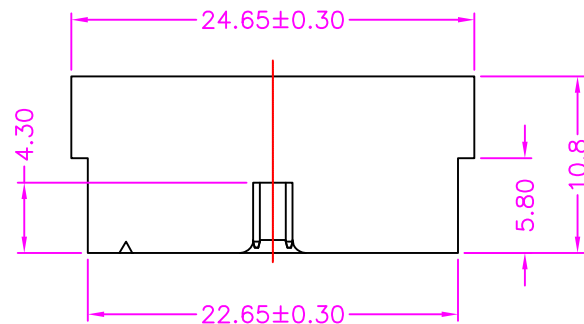
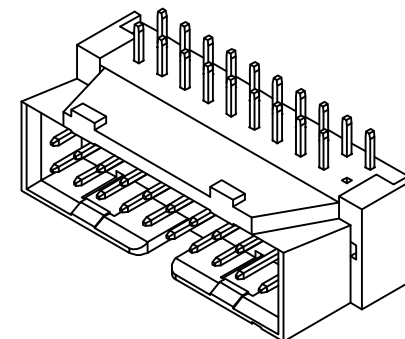
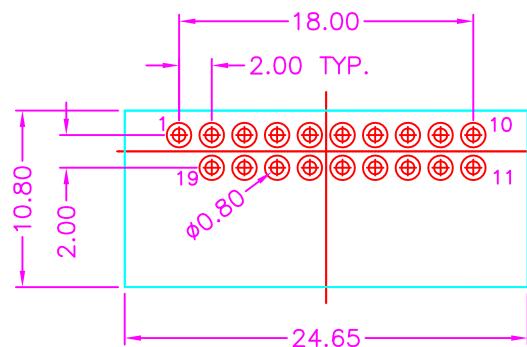
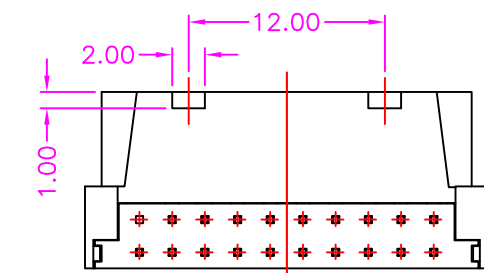


SECTION A-A



SECTION A-A

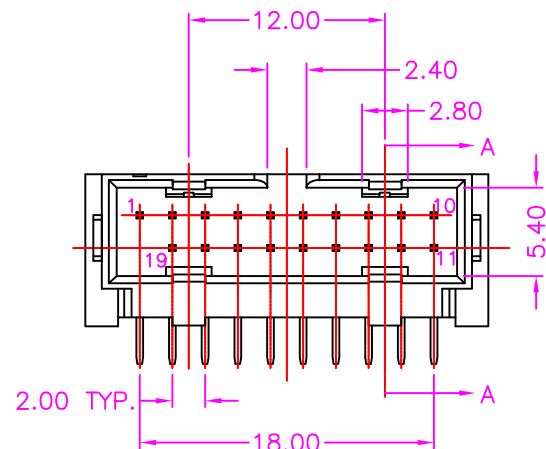

P.C.B LAYOUT
TOP VIEW ±0.05

MATERIALS

HOUSING: HI-TEMP. PLASTIC (UL 94V-0), BLUE
TERMINAL: COPPER ALLOY, GOLD PLATED ON CONTACT AREA
TIN PLATING ON SOLDER TAIL

SPECIFICATION

CURRENT RATING: 2 AMP MAX
DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
INSULATION RESISTANCE: 5000M OHMS MIN AT DC 500V
OPERATION TEMPERATURE: -40°C~+105°C

PART NUMBER:

ABHKE - 1 9 * T - 2 1 1

SERIES

TRAY PACKAGE

NO. OF POS.

TIN PLATING ON SOLDER TAIL

CONTACT PLATED OPTION

- 1: GOLD FLASH
- 3: 3u" GOLD
- 5: 5u" GOLD
- 6: 10u" GOLD
- 7: 15u" GOLD
- 9: 30u" GOLD