

PART NUMBER:

ABTNG - 0 6 \* - 1 2 2





SERIES

NO. OF POS.


TAPE REEL PACKAGE

CONTACT PLATED OPTION


1. GOLD FLASH
3. 3u" GOLD
5. 5u" GOLD
6. 10u" GOLD
7. 15u" GOLD
9. 30u" GOLD

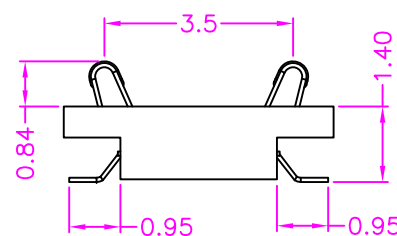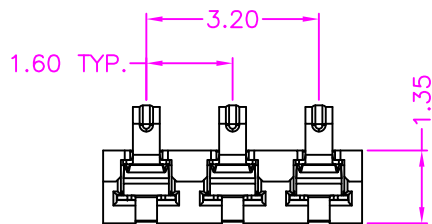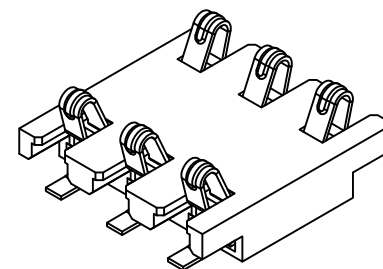

SECTION A-A

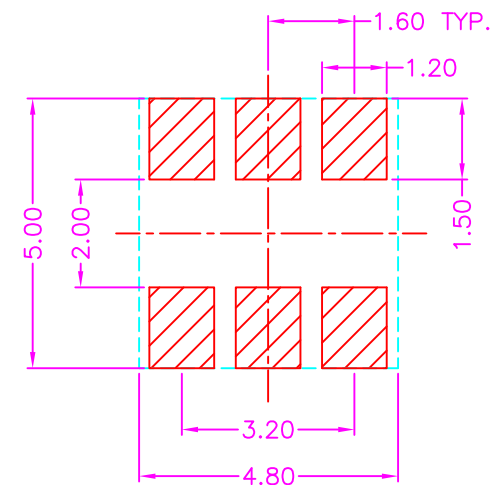

RECOMMENDED MATING PAD

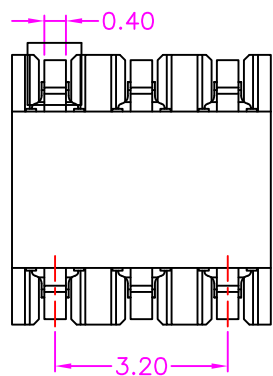

MATERIALS

HOUSING: LCP (UL 94V-0), BLACK  
 TERMINAL: COPPER ALLOY, GOLD PLATED

SPECIFICATION

CURRENT RATING: 1 AMP MAX  
 DIELECTRIC WITHSTANDING: 100V AC FOR ONE MINUTE  
 CONTACT RESISTANCE: 30m OHMS MAX  
 INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V  
 OPERATION TEMPERATURE: -40°C~+85°C