

PART NUMBER:
BUSKC – 3 3 * T – 1 1 4

- SERIES
- NO. OF POS.
- CONTACT PLATED OPTION
  1: GOLD FLASH
  3: 3u" GOLD
  5: 5u" GOLD
  6: 10u" GOLD
  7: 15u" GOLD
  9: 30u" GOLD
- TIN PLATING ON SOLDER TAIL
- TRAY PACKAGE


MATERIALS


HOUSING: LCP (UL 94V-0), BLACK
FRONT SHELL: SUS, NICKEL PLATING
REAR SHELL: SUS, NICKEL PLATING
MID PLATE: SUS, NICKEL PLATING
TERMINAL: COPPER ALLOY, GOLD PLATED CONTACT AREA
TIN PLATING ON SOLDER TAIL


SPECIFICATION


USB A TYPE
CURRENT RATING: 1.5A AMP MIN
DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
CONTACT RESISTANCE: 30m OHMS MAX
INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
OPERATION TEMPERATURE: -40°C~+85°C


USB C TYPE
CURRENT RATING:
5.0A FOR VBUS (A1,A4,A9,12,B1,B4,B9,B12)
1.25A FOR VCONN
0.25A FOR ALL THE OTHERS CONTACTS
DIELECTRIC WITHSTANDING: 300V AC FOR ONE MINUTE
CONTACT RESISTANCE: 40m OHMS MAX
INSULATION RESISTANCE: 100M OHMS MIN AT DC 300V
OPERATION TEMPERATURE: -40°C~+85°C

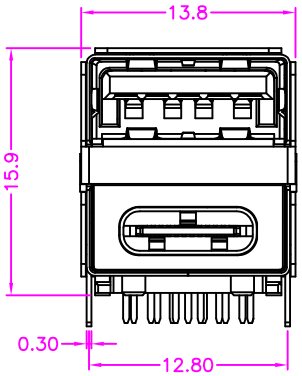


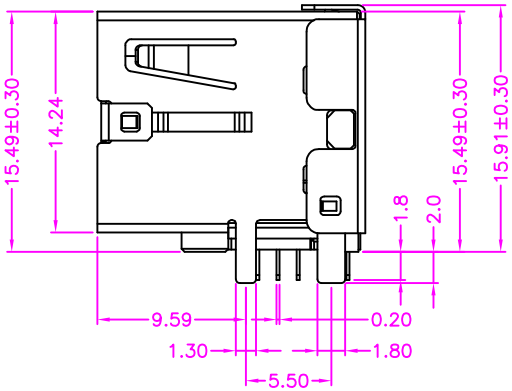



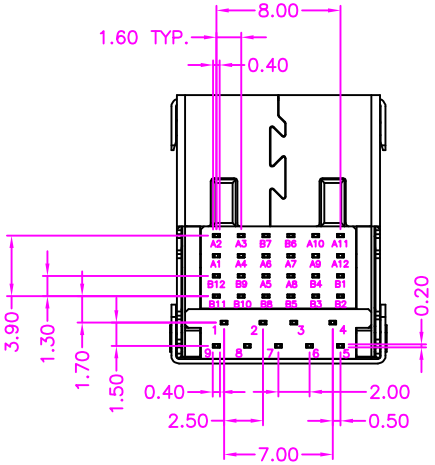




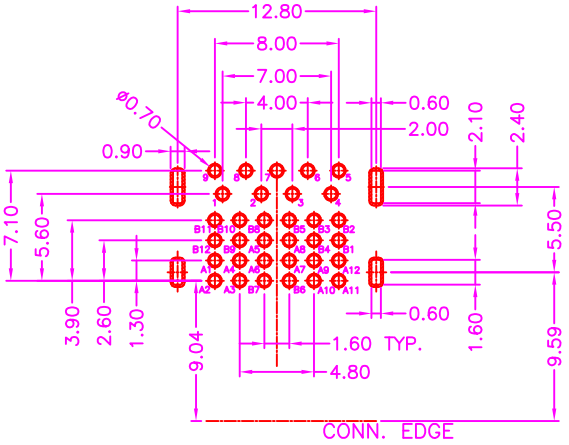

P.C.B LAYOUT
TOP VIEW ±0.05

ZICONN ELECTRONIC CO., LTD. WWW.ZICONN.COM 886-3-4687695	TOLERANCES X.±0.40 .XX±0.20 .X±0.30 .XXX±0.10	REV.	A	DRAWED BY	Anna 2025/11/19	TITLE	STACKED USB 3.0 + USB TYPE C, PCB MOUNT, R/A, FEMALE		
				APPROVED BY	Lion 2025/11/19	DRAW NO.	BUSKC-004	UNIT	MM	Sheet	1/2

C0373

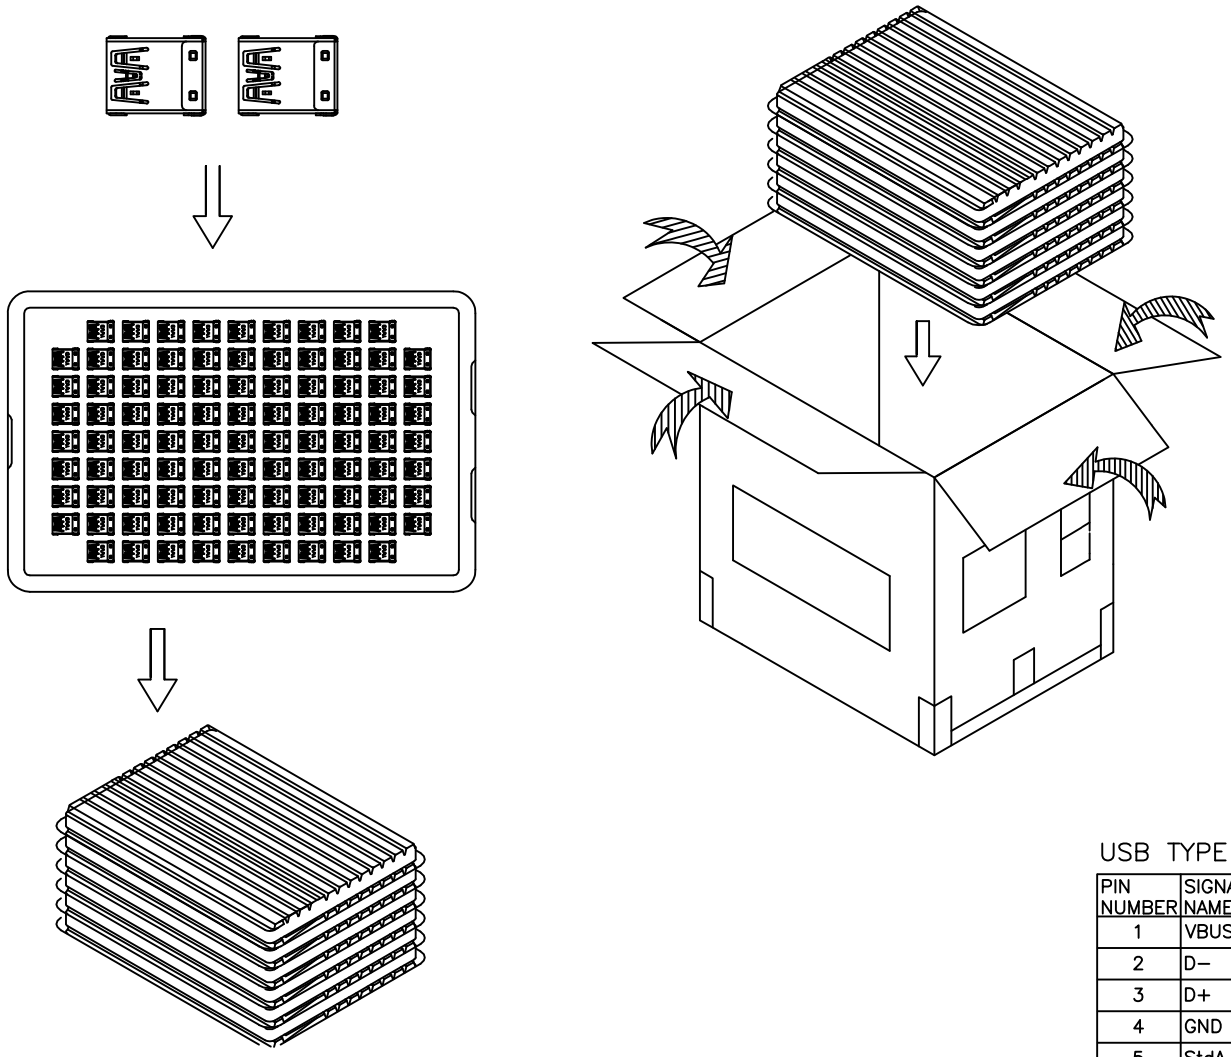

USB TYPE A PIN DEFINE

PIN NUMBER	SIGNAL NAME
1	VBUS
2	D−
3	D+
4	GND
5	StdA_SSRX−
6	StdA_SSRX+
7	GND_DRAIN
8	StdA_SSTX−
9	StdA_SSTX+

USB TYPE C PIN DEFINE

PIN	SIGNAL NAME	PIN	SIGNAL NAME
A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND

NOTE: 95PCS/ TRAY, 570PCS/ 6 TRAY/ CARTON

ZICONN ELECTRONIC CO., LTD.
WWW.ZICONN.COM 886-3-4687695

TOLERANCES
X.±0.40 .XX±0.20
.X±0.30 .XXX±0.10

REV.	A	DRAWED BY	Anna 2025/11/19	TITLE	STACKED USB 3.0 + USB TYPE C, PCB MOUNT, R/A, FEMALE				
		APPROVED BY	Lion 2025/11/19	DRAW NO.	BUSKC-004	UNIT	MM	Sheet	2/2

C0373